

FIG. 1



FIG. 2

1

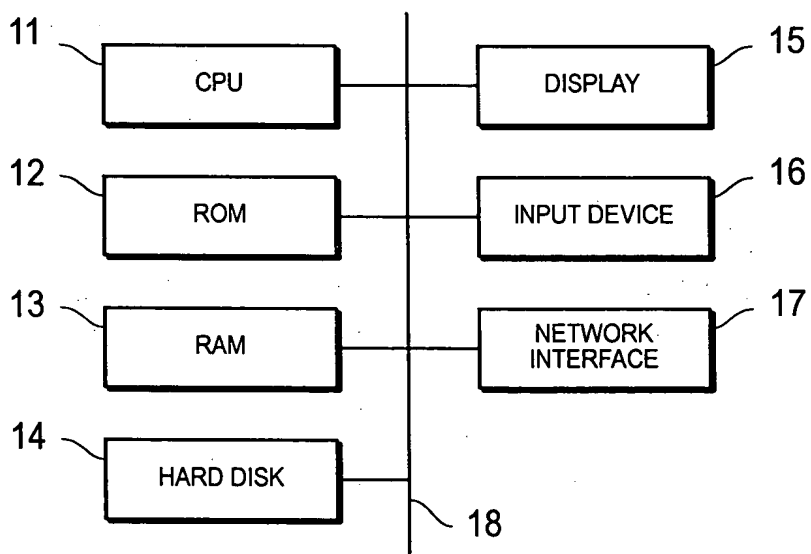


FIG. 3

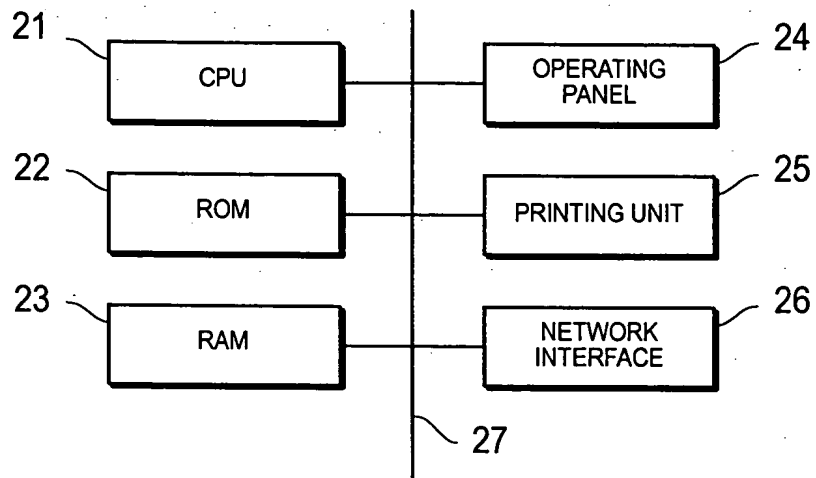


FIG. 4

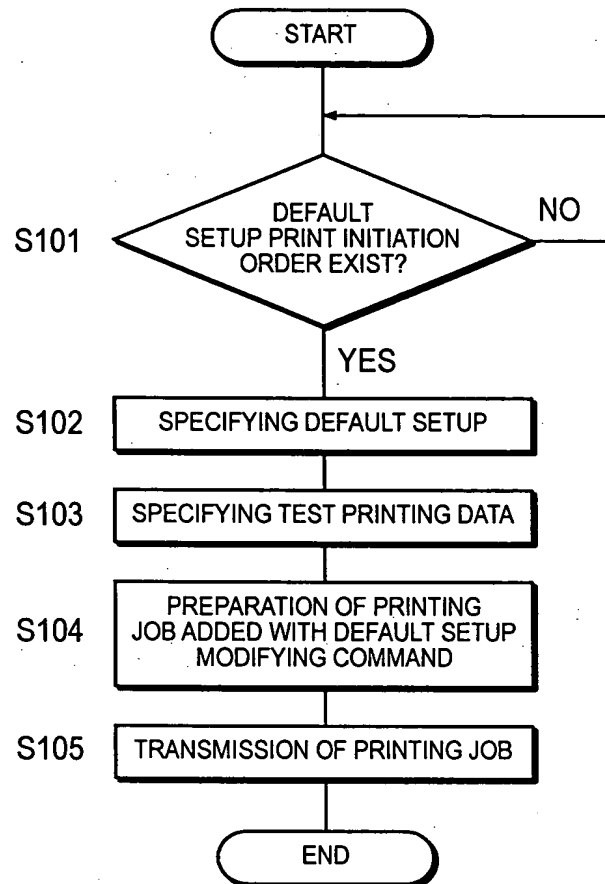


FIG. 5

4

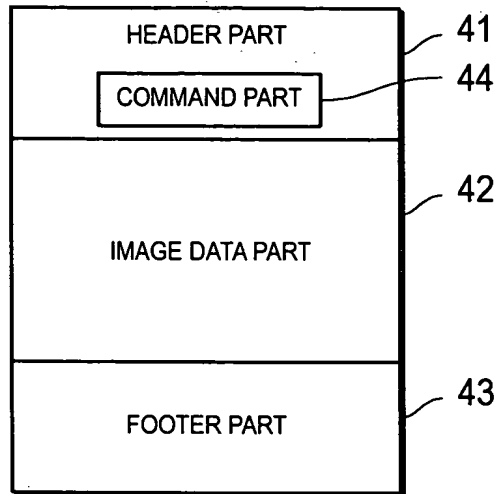


FIG. 6

44

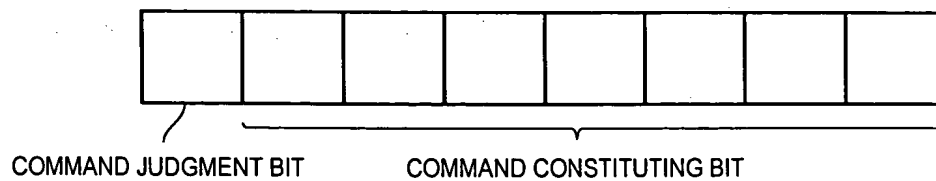


FIG. 7

5

DEFAULT SETUP COMMAND (COMMAND CONSTITUTING BIT)	COMMAND 1 (0000001)	COMMAND 2 (0000010)	COMMAND 3 (0000011)
OEM NAME	COMPANY A	COMPANY B	COMPANY C
DEFAULT LANGUAGE	ENGLISH	JAPANESE	ENGLISH
NETWORK SETUP	IP ADDRESS: aaa.aaa.aaa.aaa SUBNET MASK: 255.255.255.0 GATEWAY: aaa.aaa.aaa.001 DHCP:OFF HTTP:OFF	IP ADDRESS: bbb.bbb.bbb.bbb SUBNET MASK: 255.255.255.0 GATEWAY: bbb.bbb.bbb.001 DHCP:OFF HTTP:ON	NO
DEFAULT PAPER	LETTER	A4	LETTER
DEFAULT POWER SAVING MODE TIME SETUP	30 MINUTES	30 MINUTES	60 MINUTES
ID	1111	2222	3333
.....

FIG. 8

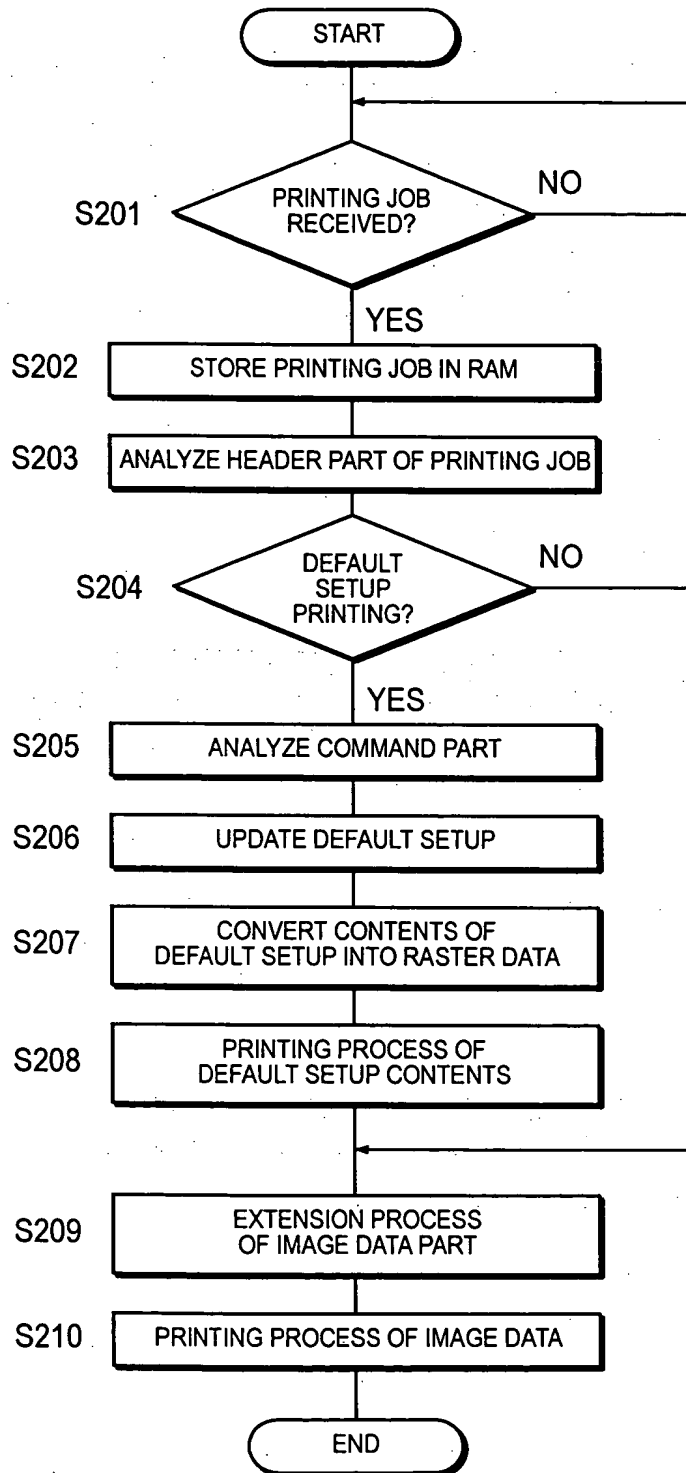



FIG. 9

6



COMPANY xxx

- LANGUAGE SETUP
JAPANESE
- NETWORK SETUP
IP ADDRESS: xxx.xxx.xxx.xxx
SUBNET MASK: xxx.xxx.xxx.xxx
GATEWAY: xxx.xxx.xxx.xxx
DHCP:ON
HTTP:ON
- DEFAULT PAPER SETUP
A4
- POWER SAVING MODE
30 MINUTES
- ID
xxxx